


Kross8¹⁶⁰ K2816

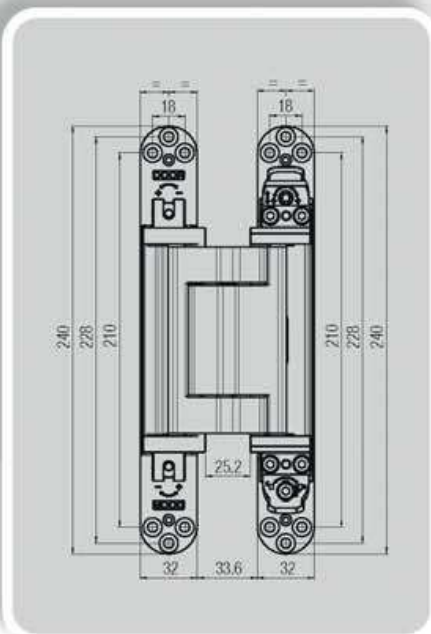

Version
ZAMAK

Finishing




min. 41 mm

Adjustments

160 kg
(2 hinges)

180°

Full HD

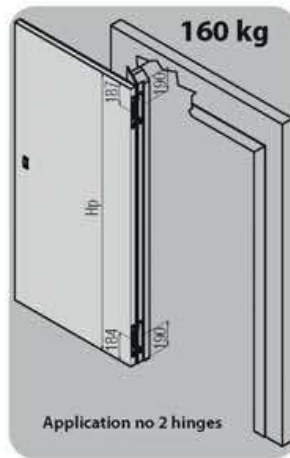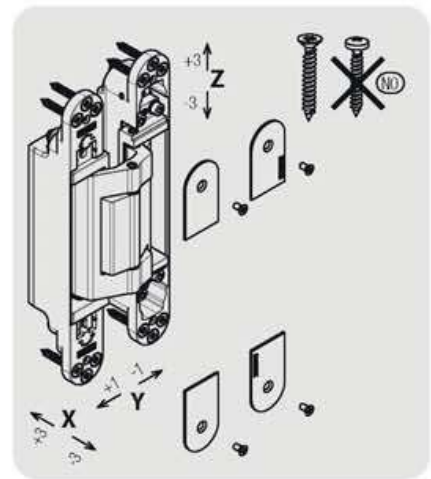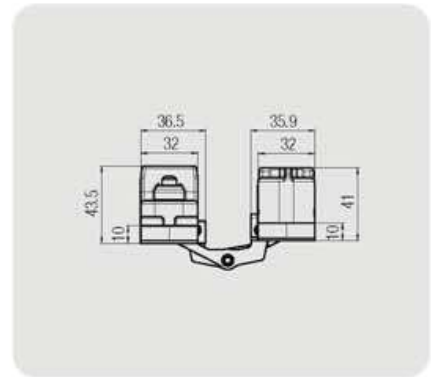

K2816 - 160 Kg - N° 2 hinges	
2000	160 160 160 160 160 160 160 160 160 154 148
1950	160 160 160 160 160 160 160 160 160 156 150 144
1900	160 160 160 160 160 160 160 160 159 152 146 141
1850	160 160 160 160 160 160 160 160 160 155 148 142 137
1800	160 160 160 160 160 160 160 157 151 144 139 133
1750	160 160 160 160 160 160 160 160 153 146 140 135 130
1700	160 160 160 160 160 160 156 149 142 136 131 126
1650	160 160 160 160 159 151 144 138 132 127 122
1600	160 160 160 160 154 147 140 134 128 123 118
1550	160 160 160 157 149 142 136 130 124 119 115
1500	160 160 160 152 144 137 131 125 120 115 111
1450	160 160 155 147 140 133 127 121 116 112 107
1540	160
926	700 800 900 950 1000 1050 1100 1150 1200 1250 1300
Door width (mm)**	

- Tested on doors: thickness min. 41 mm - height 2100 mm - width 900 mm - opening angle 0°-90°.

**With a door leaf height over 2100 mm, width over 900 mm and/or applied accessories, consult "INSTALLATION EXAMPLES".

- The application of the concealed hinges combined with other devices (door closers, bumpers, anti panic handles) has to be tested by the client.