


GACHE ELECTRIQUE ROUREG™ MINI
 ELECTRIC STRIKE ROUREG™ MINI
 ROUREG™ ELEKTRO-TÜRÖFFNER MINI
 ROUREG™ DEUROPENER MINI

SEM1B

ST_SEM1B_A_091201

RACCORDEMENT
 CONNECTING
 ANSCHLUßPLAN
 AANSLUITING

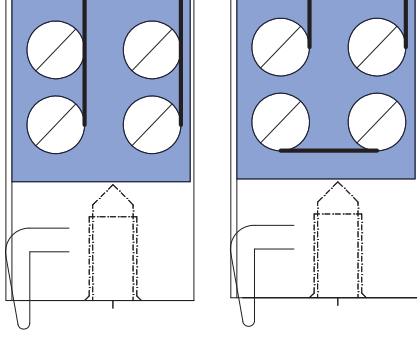

● de série / standard execution / Standardausführung / standard uitvoering
 — non disponible / not available / nicht verfügbar / niet beschikbaar

mm	h x l x p H x L x D H x B x T H x B x D	kg	°C	DaN	CE	
61,8 x 15,8 x 25,5 mm	0,1 kg	300° C	350 DaN	A EMISSION - FAIL SECURE ARBEITSSTROM - ARBEIDSSTROOM		
1 ROUREG MINI BLEU BLUE BLAU BLAUW						
SEM1B	—	—	1	5,1 - 6,9 V DC	400 mA	
			1	6 - 12 V AC	400 - 800 mA	
			2	10,2 - 13,8 V DC	200 mA	
			2	12 - 24 V AC	200 - 400 mA	
<hr/>						
				DEVERROUILLAGE IMMEDIATE SOUS PRESSION JUSQU'A : IMMEDIATE UNLOCKING UNDER LOAD UP TO : TÜRÖFFNUNG BEI EINER LAST VON BIS ZU: ONTGRENDELING ONDER DRUK VAN :		
				DC = 3 DaN	AC = 12 DaN	

