


Kombi **HYBRID** K1019 HYBRID

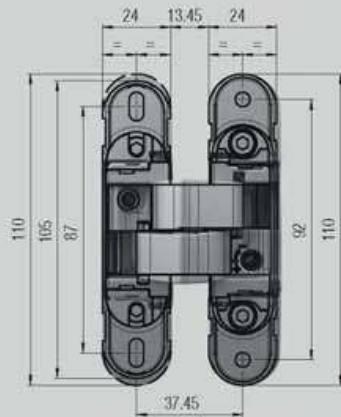

HYBRID
Version

STEEL
POM C
ZAMAK

Finishing



min. 32 mm

Adjustments



40 kg
(2 hinges)



180°




Fixing screws





Test report

N° 28-003482-PR01 - 28/01/2021
UNI EN1191:2012 Windows and doors
Resistance to opening and closing

Internal door with hinges
mod. KOMBI HYBRID K1019
Total door weight: 40kg



Warning! The hinge fastening
is only guaranteed using the
screws provided with it.

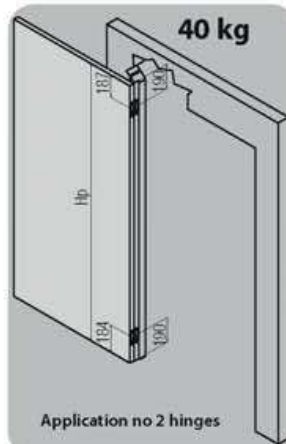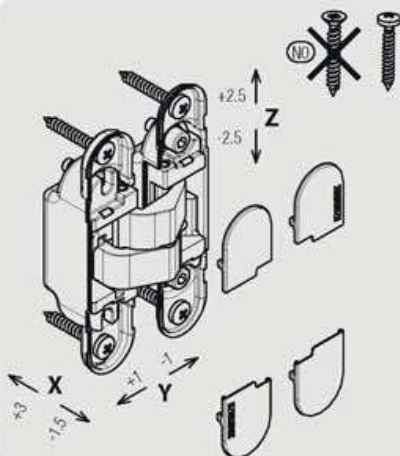

K1019 - 40 Kg - N° 2 hinges													
Hinge spacing (mm)**	2000	40	40	40	40	40	40	40	40	40	38	37	
	1950	40	40	40	40	40	40	40	40	39	38	36	
	1900	40	40	40	40	40	40	40	40	38	37	35	
	1850	40	40	40	40	40	40	40	39	37	36	34	
	1800	40	40	40	40	40	40	39	38	36	35	33	
	1750	40	40	40	40	40	38	37	35	34	32		
	1700	40	40	40	40	39	37	36	34	33	31		
	1650	40	40	40	40	38	36	35	33	32	31		
	1600	40	40	40	38	37	35	33	32	31	30		
	1550	40	40	40	39	37	36	34	32	31	30	29	
Door width (mm)**	1500	40	40	40	39	37	35	34	32	31	30	28	
	1450	40	40	38	36	35	33	31	30	29	28	27	
	1540	40											
		926	700	800	900	950	1000	1050	1100	1150	1200	1250	1300

- Tested on doors: thickness min. 32 mm - height 2100 mm - width 900 mm - opening angle 0°-90°.

**With a door leaf height over 2100 mm, width over 900 mm and/or applied accessories, consult "INSTALLATION EXAMPLES".

- The application of the concealed hinges combined with other devices (door closers, bumpers, anti panic handles) has to be tested by the client.

VADEMECUM